## **SIRIUS**

## Automatic PVC Welding and Cleaning Line










SIRIUS which is the line of Automatic PVC welding and edge cleaning has been developed for cleaning processes occuring in profile after welding and welding at the same time of four edges of plastic profiles. With automatic frame unloading unit, fast transfer to cleaning unit of profile with robot system and with the system of automatic profile rotating, SIRIUS gains time substantially while decreasing workload on user in welding and cleaning processes.



Through its electronic thermostat heat adjustment between 0°C - 350°C, welding time adjustment and digital controlled heat, quadruple welding unit provides scattering homogenised to plaque of heat.



11 pieces of profile cleaning blade and two independed cleaning unit, cleaning bottom, top, interior and external surfaces of the profile.

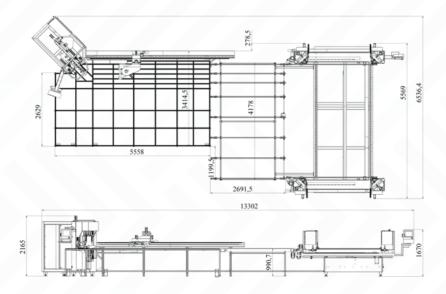

## **SIRIUS**

## Automatic PVC Welding and Cleaning Line



WELDING LINIT EDAME DIMENSIONS	
WELDING UNIT FRAME DIMENSIONS  Min. Frame Dimensions	350 mm x 410 mm
Max. Frame Dimensions	2650 mm x 4110 mm
	2000 111111 X 4110 111111
WELDING AND CLEANING UNIT PROFILE DIMENSIONS	40
Min. profile height	40 mm 200 mm
Max. rofile height	
Min. profile width	30 mm
Max. profil width	150 mm
WELDING RANGE	
Welding burr size	0.2 mm
CUTTER UNITS	
Saw blade diameter	300 mm
Saw blade motor power	1.5 kW
Saw blade motor r.p.m.	6000 r.p.m.
Saw blade thickness	3.2 mm
Milling Cutter Motor power (x2)	1.1 kW
Milling Cutter Motor r.p.m	12.000 r.p.m.
Milling Cutter Diameter	8 mm
Milling Cutter Length	120 mm
Profile external cleaning saw blade	
Cleaning blades	•
Cleaning blades Cutters	•
Cutters	•
	•
PROCESSABLE UNITS With cutter (External surface)	• • 1 3
Cutters  PROCESSABLE UNITS	
PROCESSABLE UNITS With cutter (External surface) With 3 top and 3 bottom blade (Upper and lower surfaces and inner profile)	3
PROCESSABLE UNITS With cutter (External surface) With 3 top and 3 bottom blade (Upper and lower surfaces and inner profile) With 1 top and 1 bottom blade (Upper and lower surfaces)  AIR	3 2
PROCESSABLE UNITS With cutter (External surface) With 3 top and 3 bottom blade (Upper and lower surfaces and inner profile) With 1 top and 1 bottom blade (Upper and lower surfaces)	3
Cutters  PROCESSABLE UNITS With cutter (External surface) With 3 top and 3 bottom blade (Upper and lower surfaces and inner profile) With 1 top and 1 bottom blade (Upper and lower surfaces)  AIR Pressure	3 2
PROCESSABLE UNITS With cutter (External surface) With 3 top and 3 bottom blade (Upper and lower surfaces and inner profile) With 1 top and 1 bottom blade (Upper and lower surfaces)  AIR Pressure  ELECTRICAL	6-8 Bar
Cutters  PROCESSABLE UNITS With cutter (External surface) With 3 top and 3 bottom blade (Upper and lower surfaces and inner profile) With 1 top and 1 bottom blade (Upper and lower surfaces)  AIR Pressure  ELECTRICAL Max. Power	6-8 Bar 20.85 kW
PROCESSABLE UNITS With cutter (External surface) With 3 top and 3 bottom blade (Upper and lower surfaces and inner profile) With 1 top and 1 bottom blade (Upper and lower surfaces)  AIR Pressure  ELECTRICAL	6-8 Bar
Cutters  PROCESSABLE UNITS With cutter (External surface) With 3 top and 3 bottom blade (Upper and lower surfaces and inner profile) With 1 top and 1 bottom blade (Upper and lower surfaces)  AIR Pressure  ELECTRICAL Max. Power  Voltage Frequency	3 2 6-8 Bar 20.85 kW 400V 3N PE AC
PROCESSABLE UNITS With cutter (External surface) With 3 top and 3 bottom blade (Upper and lower surfaces and inner profile) With 1 top and 1 bottom blade (Upper and lower surfaces)  AIR Pressure  ELECTRICAL Max. Power  Voltage Frequency  OPERATIONAL AREA	3 2 6-8 Bar 20.85 kW 400V 3N PE AC
Cutters  PROCESSABLE UNITS With cutter (External surface) With 3 top and 3 bottom blade (Upper and lower surfaces and inner profile) With 1 top and 1 bottom blade (Upper and lower surfaces)  AIR Pressure  ELECTRICAL Max. Power  Voltage Frequency  OPERATIONAL AREA Profile support unit	3 2 6-8 Bar 20.85 kW 400V 3N PE AC
Cutters  PROCESSABLE UNITS With cutter (External surface) With 3 top and 3 bottom blade (Upper and lower surfaces and inner profile) With 1 top and 1 bottom blade (Upper and lower surfaces)  AIR Pressure  ELECTRICAL Max. Power  Voltage Frequency  OPERATIONAL AREA  Profile support unit Barcode reader	3 2 6-8 Bar 20.85 kW 400V 3N PE AC
Cutters  PROCESSABLE UNITS With cutter (External surface) With 3 top and 3 bottom blade (Upper and lower surfaces and inner profile) With 1 top and 1 bottom blade (Upper and lower surfaces)  AIR Pressure  ELECTRICAL Max. Power  Voltage Frequency  OPERATIONAL AREA Profile support unit	3 2 6-8 Bar 20.85 kW 400V 3N PE AC
Cutters  PROCESSABLE UNITS With cutter (External surface) With 3 top and 3 bottom blade (Upper and lower surfaces and inner profile) With 1 top and 1 bottom blade (Upper and lower surfaces)  AIR Pressure  ELECTRICAL Max. Power  Voltage Frequency  OPERATIONAL AREA  Profile support unit Barcode reader  Teflon (4 pcs) Custom mold	20.85 kW 400V 3N PE AC 50-60 Hz
Cutters  PROCESSABLE UNITS With cutter (External surface) With 3 top and 3 bottom blade (Upper and lower surfaces and inner profile) With 1 top and 1 bottom blade (Upper and lower surfaces)  AIR Pressure  ELECTRICAL Max. Power Voltage Frequency  OPERATIONAL AREA Profile support unit Barcode reader Teflon (4 pcs)	3 2 6-8 Bar 20.85 kW 400V 3N PE AC 50-60 Hz
PROCESSABLE UNITS With cutter (External surface) With 3 top and 3 bottom blade (Upper and lower surfaces and inner profile) With 1 top and 1 bottom blade (Upper and lower surfaces)  AIR Pressure  ELECTRICAL  Max. Power  Voltage Frequency  OPERATIONAL AREA  Profile support unit Barcode reader  Teflon (4 pcs) Custom mold Gasket pressing system Min. Frame Dimensions (Gasket pressing system (with mold)- 480 mm X 480 mm) Automatic profile rotation system	3 2 6-8 Bar 20.85 kW 400V 3N PE AC 50-60 Hz
PROCESSABLE UNITS With cutter (External surface) With 3 top and 3 bottom blade (Upper and lower surfaces and inner profile) With 1 top and 1 bottom blade (Upper and lower surfaces)  AIR Pressure  ELECTRICAL  Max. Power  Voltage Frequency  OPERATIONAL AREA  Profile support unit Barcode reader  Teflon (4 pcs) Custom mold Gasket pressing system Min. Frame Dimensions (Gasket pressing system (with mold)- 480 mm X 480 mm)	3 2 6-8 Bar 20.85 kW 400V 3N PE AC 50-60 Hz
PROCESSABLE UNITS With cutter (External surface) With 3 top and 3 bottom blade (Upper and lower surfaces and inner profile) With 1 top and 1 bottom blade (Upper and lower surfaces)  AIR Pressure  ELECTRICAL  Max. Power  Voltage Frequency  OPERATIONAL AREA  Profile support unit  Barcode reader  Teflon (4 pcs) Custom mold Gasket pressing system Min. Frame Dimensions (Gasket pressing system (with mold)- 480 mm X 480 mm) Automatic profile rotation system Profile holding and cooling unit	3 2 6-8 Bar 20.85 kW 400V 3N PE AC 50-60 Hz

o Opsiyonal