



NOVA X

Portable Compound Radial Saw with Tabletop Ø 305 mm



FEATURES

Used for cutting processes of aluminum, plastic and wooden materials.

- Cutting at any desired angle between -45° and +45°
- 0°, 5°, 10°, 15°, 20°, 22,5°, 25°, 30°35°, 40°, 45° right and left angle fixing
- Head with ability to tilt left between 0° and 45° (Performs tilt cutting when lower plate is at 0 [Zero] position)
- Laser Guide for accurate cuts
- Screw workpiece clamp
- Anti vibration feet

STANDARD EQUIPMENT





- Screw workpiece clamp

OPTIONAL EQUIPMENT


- Stand
- Ø 305 mm saw blade
- Conveyor
- Brake System
- Three-phase system
- Profile gauge







WEB

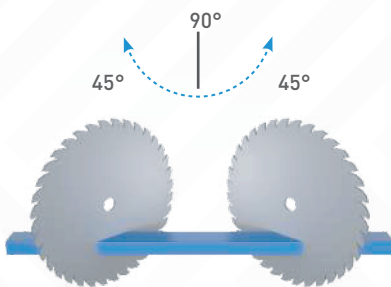

Cutting Dimensions (mm)	
90°x90°	85 x 315
45°x90°	85 x 220
90°x45°	40 x 315
45°x45°	35 x 220

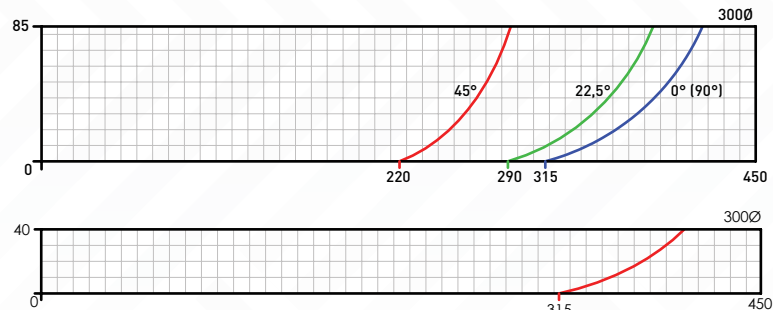

				
HP kW	n r.p.m	Hz	I (230 V)	5 kg
1,5 1,1	3000	50 60	5 A	
Ø D	Ø d	s	n	c
305 mm	30-32 mm	3,2 mm	3000 r.p.m	160 mm
h	c	h	45°	I x w x h (mm)
40 mm	40 mm	40 x 315 mm		570 x 1030 x 685 35,5 kg

