

GARNET Mini D

4 Axis CNC Compact Processing Center



FEATURES

Compact milling center, on the 3 surfaces of the aluminum and plastic profiles, with parametric program templates, developed to perform operations such as lock, handle, hinge, latch slot and opening processes. Its fourth motor also enables 45° water drainage opening on PVC profiles.

- 10" Touchscreen
- Easy to program user interface
- Easy profile positioning with gauge and laser marking
- Spindle motors running independently on 3 different surfaces

STANDARD EQUIPMENT

- Spray-cooling system
- Horizontal and vertical pneumatic clamps (2 pcs top, 2 pcs front)
- 3 piece 6mm milling cutters
- Right and left profile gauge
- Laser marking

OPTIONAL EQUIPMENT






- 5, 6, 8 and 10 mm milling cutters
- Servo Control Profile Support (Comet GM-Comet Plus)

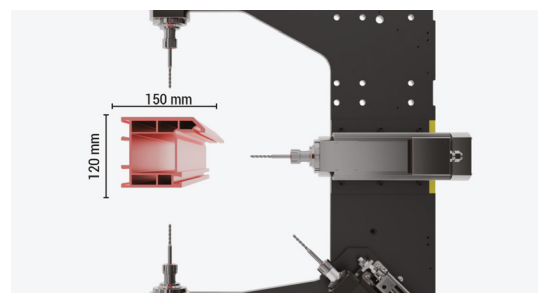
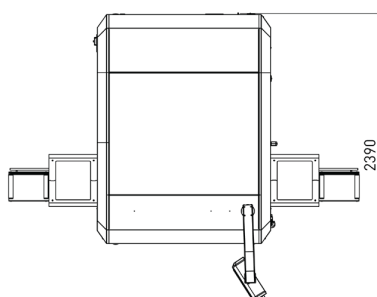

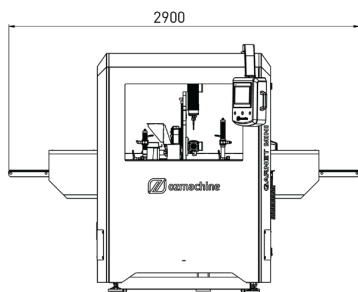


YouTube



WEB

 (x3)							 (x3)				 (x3)	 H				 Z Y X						
HP kW	n	Hz	I (230 V)	HP kW	n	Hz	HP kW	n	Hz	I (230 V)	Ø D max.	H	X	Y	Z	Air Pressure	Air Consumption	Gross Net				
4 3	18000 r.p.m	300	7 A	0.55	18000 r.p.m	300	1 0,75	3000 r.p.m	50	4,6 A	13 mm	118 mm	350 mm	150 mm	120 mm	6 - 8 bar	40 L / dk.	1000 kg 800 kg				





GARNET Mini D

4 Axis CNC Compact Processing Center

MACHINING LENGTHS

X Axis (Longitudinal)	350 mm
Y Axis (Lateral)	150 mm
Z Axis (Vertical)	120 mm

POSITIONING SPEED

X Axis (Longitudinal)	30 m/min
Y Axis (Lateral)	30 m/min
Z Axis (Vertical)	30 m/min

AIR

Pressure	6-8 Bar
Consumption	40 L / min

ELECTRICAL

Maximum power	12 kW
Voltage	400V 3P, PE AC
Frequency	50-60 Hz

SPINDLE

Spindle with cooling fan	3
Maximum power	3 kW
Maximum rotation speed	18.000 rpm
Tool holder	ER 20

PROFILE POSITIONING

Right and left profile gauge	●
Laser marking	●

PROFILE TIE-DOWN MEASUREMENTS

Xmax / Xmin (Longitudinal)	- / 660 mm
Ymax / Ymin (Lateral)	150 mm / -
Zmax / Zmin (Vertical)	120 mm / -

CONTROL UNIT

Touchscreen	10"
Data transfer via USB	●
Smart CAM post processing	○

OPERATIONAL AREA

Clamps, standard quantity	4
Automatic Tool cooling system	●
Guard cabin for machining area	●

● Standard ○ Opsiyonal

