

# VEGA - II M

Manual Single Head Saw Ø 400 mm



## FEATURES

Used for cutting processes of aluminum, plastic and wooden profiles.

- Safe cutting with double spring system and saw barrier
- Cast core with impact resistance
- Cutting at any desired angle between -45° and +45°
- Cutting at 0°, 15°, 22.5°, 30°, 45° right and left fixed angles
- Manual cutting process and operating system
- Pneumatic vertical and horizontal clamps
- Three-phase system

## STANDARD EQUIPMENTS

- Ø 400 mm saw blade
- Spray-Cooling system

## OPTIONAL EQUIPMENTS

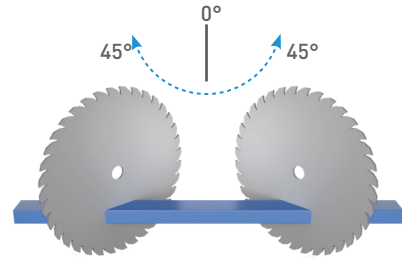
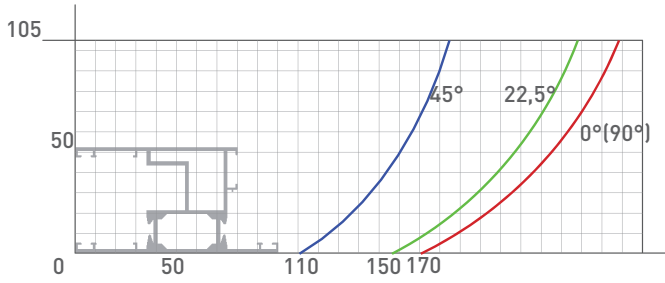
- Conveyor
- Single-phase system







YouTube



WEB



|  |               |          |              |  |             |           |               |  |  |  |
|-------------------------------------------------------------------------------------|---------------|----------|--------------|-------------------------------------------------------------------------------------|-------------|-----------|---------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| HP<br>kW                                                                            | n             | 3~<br>Hz | I<br>(400 V) | ø D                                                                                 | ø d         | s         | n             | Air<br>Pressure                                                                     | Air<br>Consumption                                                                   | l x w x h<br>(mm)                                                                     |
| 3<br>2,2                                                                            | 3000<br>r.p.m | 50<br>60 | 4,8<br>A     | 400<br>mm                                                                           | 30-32<br>mm | 3,6<br>mm | 3000<br>r.p.m | 6 - 8<br>bar                                                                        | 15 L / min                                                                           | 710 x 870 x 1565<br>88 kg                                                             |