
GEMINI SERIES / GEMINI SERİSİ

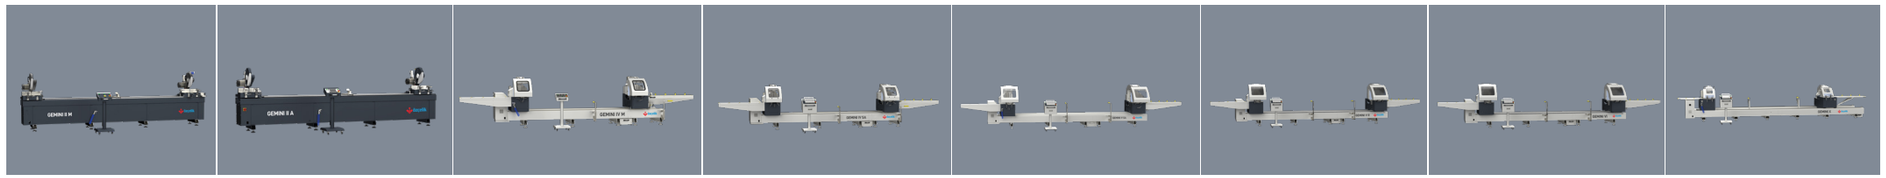

	GEMINI - II M	GEMINI - II A	GEMINI - IV M	GEMINI - IV SA	GEMINI - V SA	GEMINI - V R	GEMINI - VI	GEMINI - X
Material (Alm / Pvc / Wood) Malzeme (Alm / Pvc / Ahşap)	✓	✓	✓	✓	✓	✓	✓	✓
Saw Diameter (mm) / Testere Çapı (mm)	Ø 400	Ø 400	Ø 450	Ø 450	Ø 550	Ø 550	Ø 550	Ø 600
Motor Power (kw) / Ø 400 Motor Gücü (kw)	2,2	2,2	2,2	2,2	2,2	2,2	2,2	3
Cutting Angle (°) Kesim Açısı (°)	-45 / 45	-45 / 45	**90 / 45 (Internal Model)- 45 / 90 (External Model)** 90 / 45 (İç Açı Modeli) 45 / 90 (Dış Açı Modeli)	**90 / 45 (Internal Model)- 45 / 90 (External Model)** 90 / 45 (İç Açı Modeli) 45 / 90 (Dış Açı Modeli)	**90 / 45 (Internal Model)- -22, 45 / 90 (External Model)** 90 / 45 (İç Açı Modeli) -22,5, 45 / 90 (Dış Açı Modeli)	-22,5 / 45	-22,5 / 45	90 / 30
X-Axis (Longitudinal) Movement X Ekseni (Uzunlamasına) Hareketi	**Manual Manuel**	**Automatic (Electronic Control)** Otomatik (Elektronik Kontrol)	**Manual (Measurement Reading with Digital Display)** Manuel (Dijital Gösterge ile Ölçü Okuma)	**Automatic (Servo)** Otomatik (Servo)	**Automatic (Servo)** Otomatik (Servo)	**Automatic (Servo)** Otomatik (Servo)	**Automatic (Servo)** Otomatik (Servo)	**Automatic (Servo)** Otomatik (Servo)
Angle Positioning Açı Konumlama	**Manual Manuel**	**Manual Manuel**	**Hydropneumatic (90 / 45 or -45 / 90 one button automatic)** Hidropnömatik (90 / 45 veya -45 / 90 tek tuşla otomatik)	**Hydropneumatic (90 / 45 or -45 / 90 one button automatic)** Hidropnömatik (90 / 45 veya -45 / 90 tek tuşla otomatik)	**Hydropneumatic (90 / 45 or -45 / 90 one button automatic)** Hidropnömatik (90 / 45 veya -22,5 / -45 / 90 tek tuşla otomatik)	**Automatic (Servo)** Otomatik (Servo)	**Automatic (Servo)** Otomatik (Servo)	**Automatic (Servo)** Otomatik (Servo)
Positioning at Intermediate Angles Ara Açılara Konumlama	**Manual Manuel**	**Manual Manuel**	**Manual Manuel**	**Manual Manuel**	**Manual Manuel**	**Automatic (Servo)** Otomatik (Servo)	**Automatic (Servo)** Otomatik (Servo)	**Automatic (Servo)** Otomatik (Servo)
Min. with Double Head Cutting Size- 90/45 (mm) Çift Kafa ile Min. Kesim Ölçüsü - 90/45 (mm)	610 / 610	610 / 610	560/560	400 / 560	480 / 720	480 / 720	480 / 720	460 / 460
Max. with Double Head Cutting Size - 90/45 (mm) Çift Kafa ile Max. Kesim Ölçüsü - 90/45 (mm)	4550 / 4550	4550 / 4550	4040 / 4040	4040 / 4040	4040 / 4040	5050 / 5050	5050 / 5050	6000 / 6000
Optional Length Extension on X Axis X Ekseninde İsteğe Bağlı Boy Uzatma	X	X	Opt. / Ops.	Opt. / Ops.	Opt. / Ops.	Opt. / Ops.	Opt. / Ops.	Opt. / Ops.
Saw Speed Adjustment / Testere Hız Ayarı	✓	✓	✓	✓	✓	✓	✓	✓
Digital Adjustment of Saw Output Adjustment Testere Çıkış Ayarını Dijital Ayarlama	X	X	X	Ops.	Ops.	✓	✓	✓
Profile Intermediate Support / Profil Ara Destek	**Manual (1 pcs) Manuel (1 ad.)**	**Manual (1 pcs) Manuel (1 ad.)**	**Automatic (1 pcs) Otomatik (1 ad.)**	**Automatic (2 pcs) Otomatik (2 ad.)**	**Automatic (2 pcs) Otomatik (2 ad.)**	**Automatic (2 pcs) Otomatik (2 ad.)**	**Automatic (2 pcs) Otomatik (2 ad.)**	**Automatic (3 pcs) Otomatik (3 ad.)**
Conveyor - Moving Head / Konveyör - Hareketli Kafa	X	X	✓	✓	✓	✓	✓	✓
Conveyor - Fixed Head / Konveyör - Sabit Kafa	X	X	Opt. / Ops.	Opt. / Ops.	Opt. / Ops.	✓	✓	✓
Spray Saw Cooling System / Püskürtmeli Testere Soğutma Sistemi	✓	✓	✓	✓	✓	✓	✓	✓
Barcode Printer / Barkod Yazıcı	X	X	X	Opt. / Ops.	Opt. / Ops.	✓	✓	✓
Oz Machine Softcut (Cutting optimization program) / Oz Machine Softcut (Kesim optimizasyon programı)	X	X	X	Opt. / Ops.	Opt. / Ops.	Opt. / Ops.	Opt. / Ops.	Opt. / Ops.
Remote Network Connection, Ethernet and USB Data Transfer / Uzaktan Ağ Bağlantısı , Ethernet ve USB Data Transferi	X	X	✓	✓	✓	✓	✓	✓